

PROJOY_{electric}

— Switch To Safety! —

PEBS-H Series

(Battery Switch)

DC Miniature Circuit Breaker



Features

DC Miniature Circuit Breakers PEBS-H, with capacities of load isolation and overload/short circuit protection, are designed for PV, energy storage and other DC applications, mainly placed between batteries and hybrid inverters. Max voltage up to 1000VDC, current up to 63A. The main designing criteria of this circuit breakers is to provide scientific arc extinguishing and flash barrier technology to fulfill quick and safe current interruption. Tested according to EN 60947-2, AS/NZS IEC 60947.2: 2015.


- Protection Functions: overload, short circuit
- Rated short circuit breaking capacity I_{cu} up to 6 kA
- Non-polarity, Easy wiring
- Rated Current I_n up to 63A
- Rated Voltage U_e up to 1000V
- Designed for PV, energy storage and other DC applications




Select Code

PEBS	a	b	c	d	H
PROJOY ELECTRIC BATTERY SWITCH	RATED VOLTAGE	RATED CURRENT	TRIPPING CURVE	POLES	HIGH VOLTAGE
	250V	63A / 50A	B / C	1	
	500V	40A / 32A		2	
	750V	25A / 20A		3	
	1000V	16A / 10A		4	


Contact Configuration

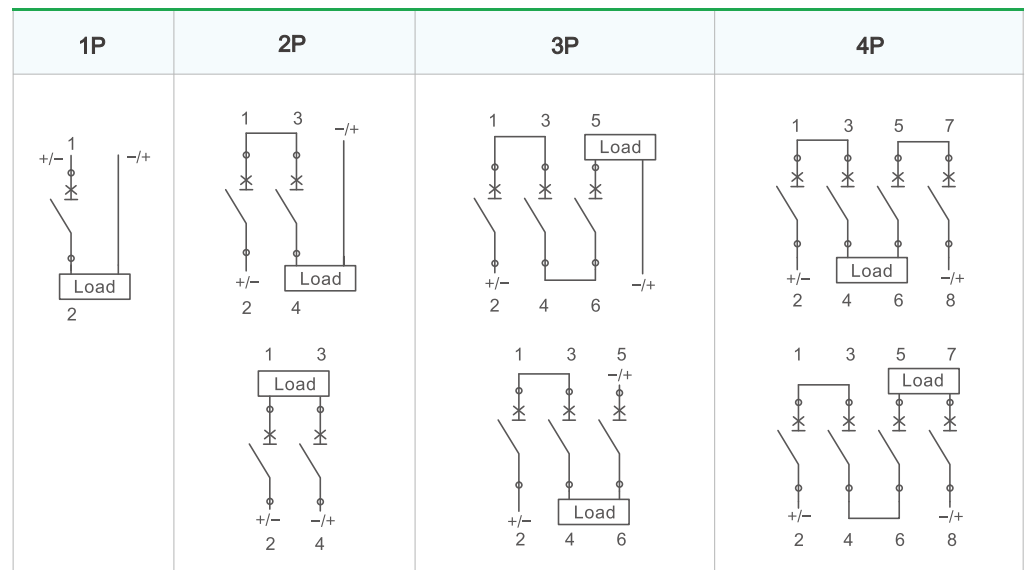

Dimensions

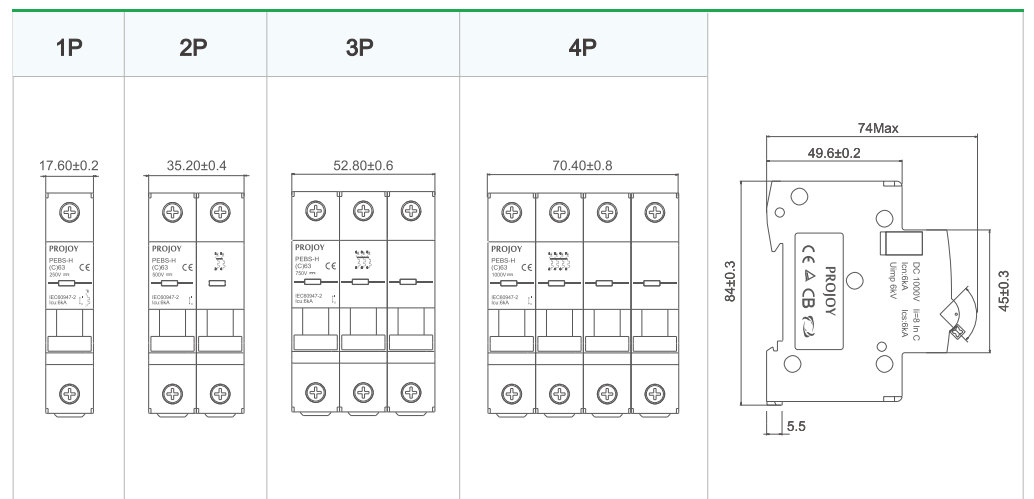


Tripping Characteristics

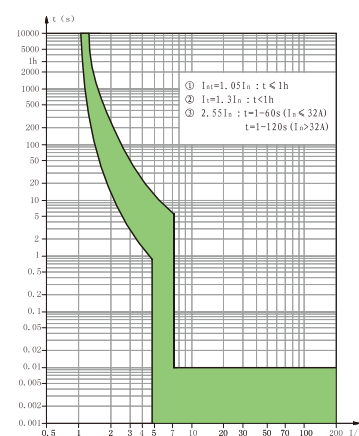

B Curve $4I_n(1\pm 20\%)$

- Suitable for pure resistive load and microinductive circuit
- Available to rated current of 10A ~ 63A(63A Frame)
- Instantaneous tripping range: $4I_n\pm 20\%$

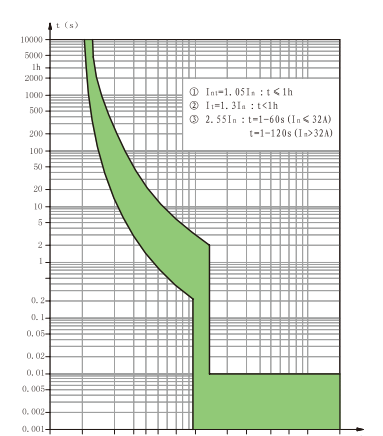

C Curve $8I_n(1\pm 20\%)$

- Suitable for general load and power distribution circuit
- Available to rated current of 10A ~ 63A(63A Frame)
- Instantaneous tripping range: $8I_n\pm 20\%$



ProJoy Electric Co., Ltd.

XinTang Industrial Zone, PingJiang District, Suzhou, China
 Tel: +86 512 6878 6489 | Fax: +86 512 6878 6489
 Email: sales@projoy-electric.com | www.projoy-electric.com



Technical data

According to EN60947-2, AS/NZS IEC 60947.2: 2015.

Pole		1P	2P	3P	4P
Rated Working Voltage Ue		250 V DC	500 V DC	750 V DC	1000 V DC
Frame Current		63A			
Rated Current In		63A, 50A, 40A, 32A, 25A, 20A,16A,10A			
Rated Insulation Voltage Ui		1000V			
Rated Impulse Withstand Voltage Uimp		6kV			
Tripping Characteristics		B/C			
Tripping Type		Thermal Magnetic			
Rated Ultimate Short-Circuit Breaking Capacity Icu		6kA			
Rated Service Short-Circuit Interrupting Capacity Ics		6kA			
Electrical Life	Actual	10000 Cycles (63A Frame)			
	Standard	1500 Cycles			
Mechanical Life	Actual	20000 Cycles (63A Frame)			
	Standard	8500 Cycles			
Overvoltage Category		III			
Pollution Degree		3			
Ingress Protection		IP40; Wiring port IP20			
Resistance to humidity and heat		Class 2			
Relative Humidity		≤ 95 %			
Vibration		acc. to IEC60068-2-6			
Shocks		acc. to IEC60068-2-27			
Terminal capacity		2.5~35mm²			
Fastening Torque of Terminals		2.0 ~ 3.5 Nm			
Ambient Temperature		-30℃~70℃			
Storage Temperature		-40℃~85℃			
Installation Method		DIN			
Elevation		≤2000m			
Dimension	Width:17.6mm/pole (63A Frame)				
	High: 84mm				
	Depth: 74mm				
Weight		0.12kg/Pole			

Package Information

Storage

Current	Pole	Box	Carton	Pallet	Products should be stored in the warehouse where there is ventilation. The relative humidity there should not exceed 80%, and the ambient temperature there is between -40 ℃ to + 85 ℃. In addition, there should not be acidic, alkaline and corrosive gas in the air. Products should not be deposited more than 5 years in the above mentioned conditions since the producing date.
63A/32A	1P	12	8	80	
	2P	6	8	80	
	3P	4	8	80	
	4P	3	8	80	

Order Choosing Specification

Client Information:

Rated Current (A)								Trip Type		No. of Pole				Quantity	Delivery Date
☐ 63	☐ 50	☐ 40	☐ 32	☐ 25	☐ 20	☐ 16	☐ 10	☐ B	☐ C	☐ 1	☐ 2	☐ 3	☐ 4		
☐ 63	☐ 50	☐ 40	☐ 32	☐ 25	☐ 20	☐ 16	☐ 10	☐ B	☐ C	☐ 1	☐ 2	☐ 3	☐ 4		
☐ 63	☐ 50	☐ 40	☐ 32	☐ 25	☐ 20	☐ 16	☐ 10	☐ B	☐ C	☐ 1	☐ 2	☐ 3	☐ 4		
☐ 63	☐ 50	☐ 40	☐ 32	☐ 25	☐ 20	☐ 16	☐ 10	☐ B	☐ C	☐ 1	☐ 2	☐ 3	☐ 4		

ProJoy Electric Co., Ltd.